




ROMET

Rotary Gas Meters

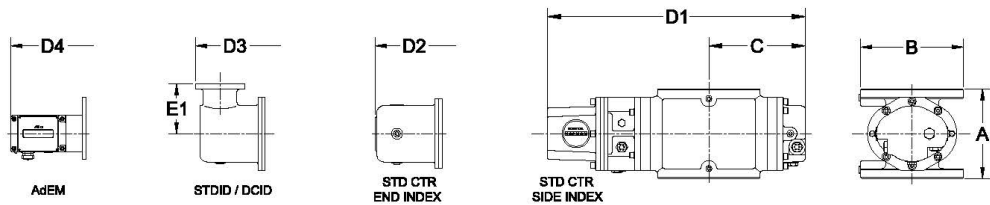

METER SIZE	ANSI 125 FF FLANGE	A	B	C	D1	D1 (no Mag. Hsg)	D2	D3	D4	E1	WEIGHT (lbs)
RM16	2"	6.75"	Ø 6.0"	3.08"	10.55"	8.09"	12.03"	12.86"	13.75"	4.00"	12-15

RM16 - SOFT METRIC


SOFT METRIC RM16 2" FLANGE CONNECTION

TECHNICAL SPECIFICATION

Connection (Flange)	ANSI 125FF	2"
MAOP	(kPa)	1206
Flow Capacity	(m ³ /h)	16
Rangeability @ ± 1% Error		25:1
Rangeability @ ± 2% Error		50:1
Start Rate	(m ³ /h)	.050
Stop Rate	(m ³ /h)	.040
Differential @ 100% Flow	(Pa)	62
Instrument Drive Rate	(m ³ /rev)	.1
LF Pulser (Optional on Std Ctr)	(m ³ /pulse)	.1

CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

RM16 METER (SM ³ /H)	
Gauge Pressure kPa 1.72	RM16 Qmax = 16 m ³ /hr
5	16.7
10	17.5
50	23.8
100	31.7
150	39.6
200	47.5
250	55.4
300	63.3
500	94.9
750	134.4
1000	173.9
1100	189.7
1200	205.4

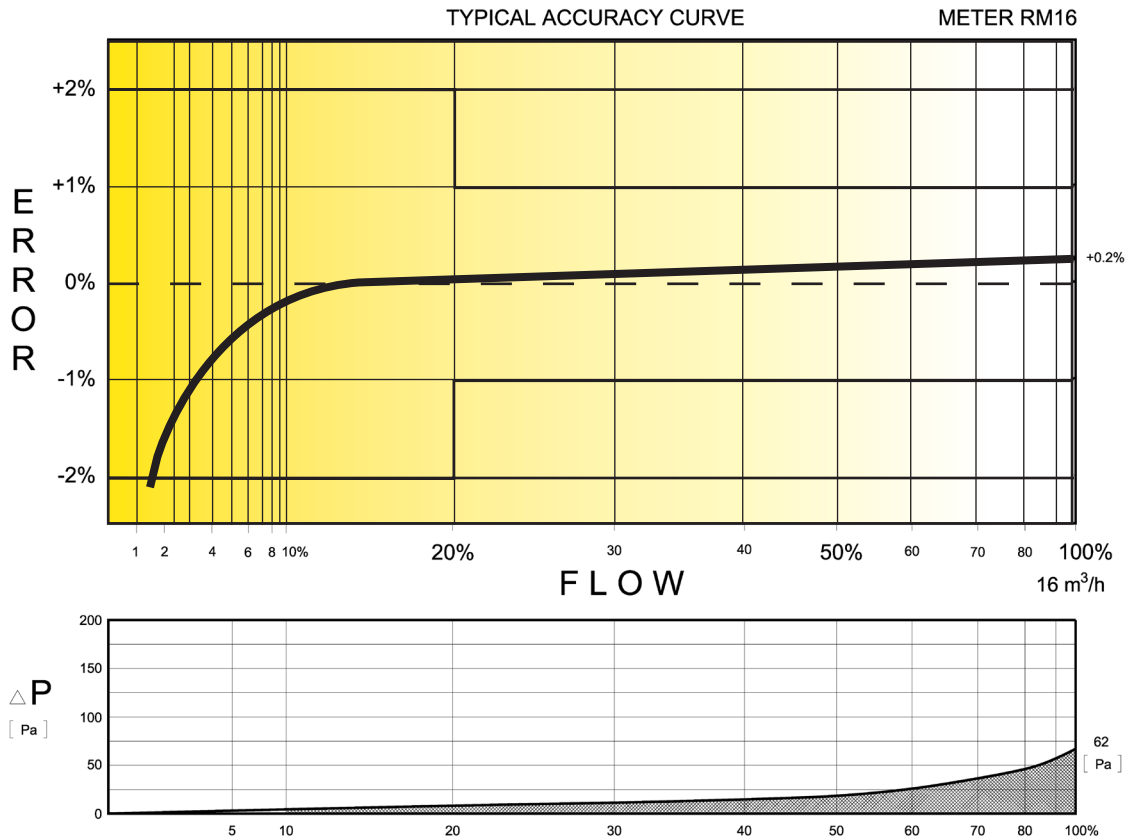

ROMET

GAS METERS AND ELECTRONIC INSTRUMENTS
 Phone 905-624-1591 USA 1-800-387-3201
 www.rometlimited.com • email: romet@rometlimited.com

The values quoted are typical of normal production. They do not constitute a specification. Romem Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked. However, Romem Limited will not assume responsibility for any possible omissions or errors.
 ROMET and ROMET & DESIGN are registered trademarks of Romem Limited. Romem Limited's gas metering technology is protected under U.S. Patent No. 4,910,519 and 6,453,721 and Canadian Patent No. 1,293,568.